


### Dimensions

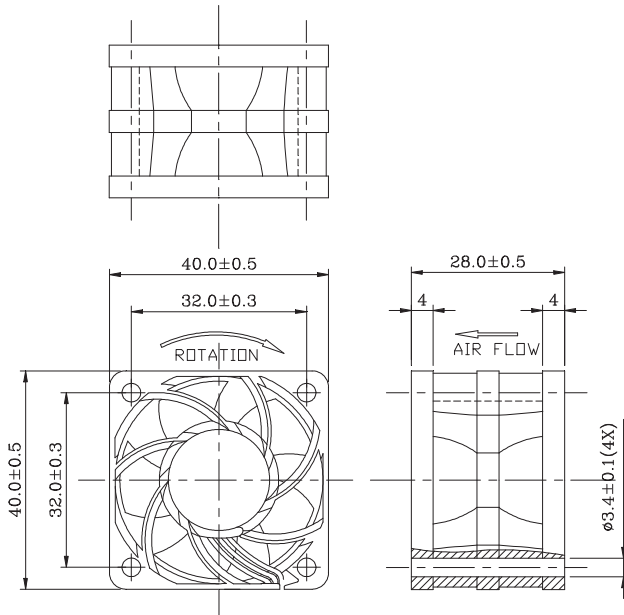


Air exhaust over struts. Rotational direction CCW looking at rotor.

Brushless DC Motor	Bearing Type
Weight: 30g Impedance protected Lead wire UL 1095 AWG 28	Ceramic

\* All fans are with electronic protection against reverse polarity. The fan only operates when the polarity is correct.

### Performance Curves

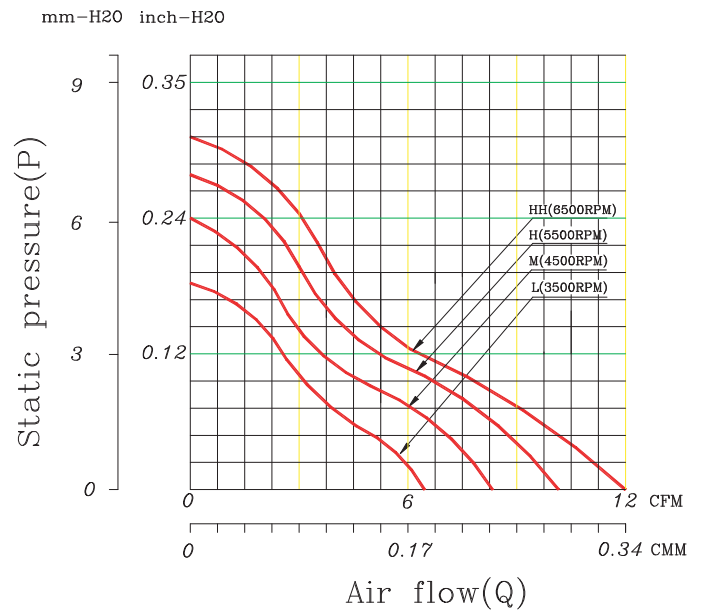

Function Options	
<input checked="" type="checkbox"/> Frequency Generator	<input checked="" type="checkbox"/> Auto Restart

- \* Please contact us for PWM function availability.
- \* Please contact us for IP55 availability.
- \* Safety Approval: CE, UL, TUV

### Specifications

Model	Rated Voltage (VDC)	Rated Current (Amp)	Input Power (Watts)	Nominal Speed (RPM)	Airflow (CFM)	Static Pressure (inch -H2O)	Noise Level (dBA)
FAN4028C5HH	5	0.33	1.65	6500	12.03	0.31	30.00
FAN4028C5H	5	0.25	1.25	5500	10.16	0.28	26.00
FAN4028C5M	5	0.17	0.85	4500	8.33	0.24	22.00
FAN4028C5L	5	0.11	0.55	3500	6.46	0.19	19.00

\* Specifications are subject to change without prior notice.

\* Check with your distributor for models available.