



### Dimensions

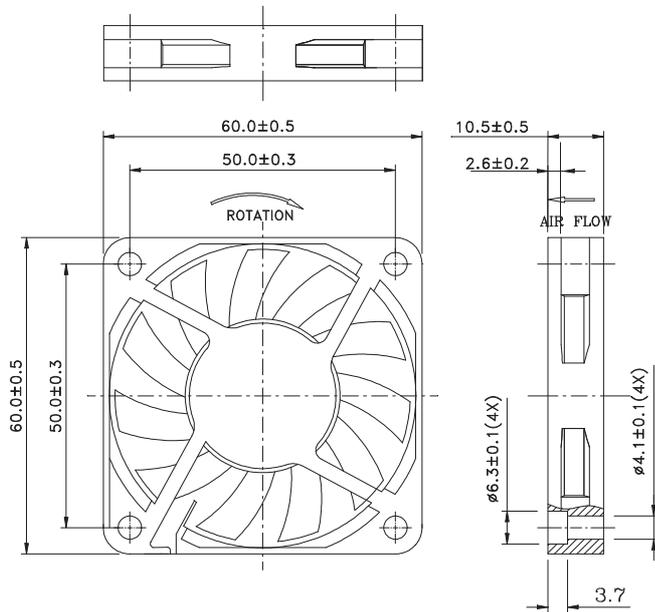

### Performance Curves

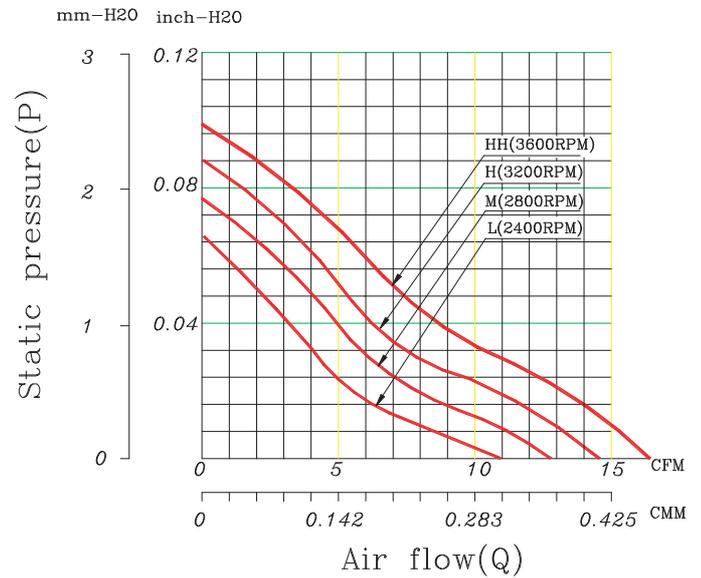

Air exhaust over struts. Rotational direction CCW looking at rotor.

Brushless DC Motor	Bearing Type
Weight: 50g Impedance protected Lead wire UL 1007 AWG 26	Ceramic

\* All fans are with electronic protection against reverse polarity. The fan only operates when the polarity is correct.

Function Options	
<input type="checkbox"/> Frequency Generator	<input type="checkbox"/> Auto Restart
<input type="checkbox"/> Temperature Control	<input type="checkbox"/> Rotation Detection

- \* Please contact us for PWM function availability.
- \* Please contact us for IP55 availability.
- \* Safety Approval: CE, UL, TUV

### Specifications

Model	Rated Voltage (VDC)	Rated Current (Amp)	Input Power (Watts)	Nominal Speed (RPM)	Airflow (CFM)	Static Pressure (inch -H2O)	Noise Level (dBA)
FAN6010C5HH	5	0.32	1.60	3600	16.41	0.10	27.00
FAN6010C5H	5	0.29	1.45	3200	14.59	0.09	24.00
FAN6010C5M	5	0.21	1.05	2800	12.76	0.08	21.00
FAN6010C5L	5	0.13	0.65	2400	10.94	0.06	18.00

\* Specifications are subject to change without prior notice.

\* Check with your distributor for models available.